

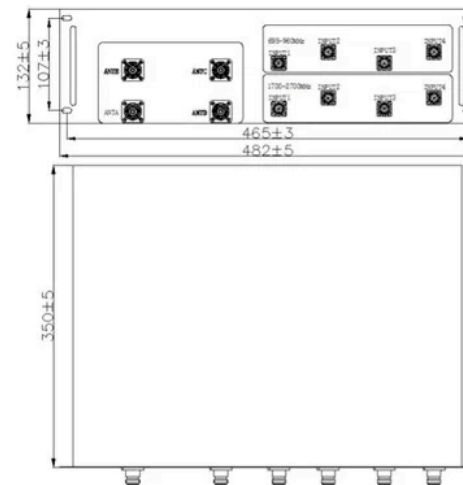


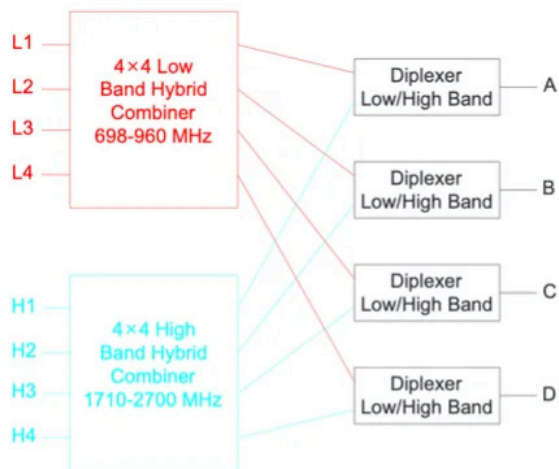

Combiner

8 X 4 Combiner

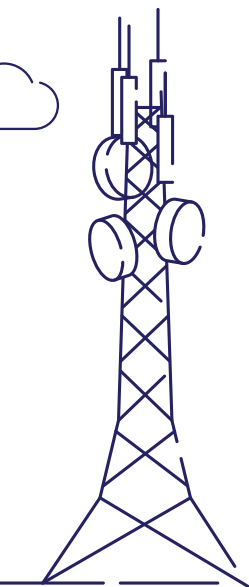

Parameter	Specification	
Frequency Range	Inputs L1 to L4	Inputs H1 to H4
	698-6000MHz	
Input Isolation(Min)	18dB	
Input Return Loss(Min)	16dB	
Out Return Loss(Min)	16dB	
Between Bands(Min)	55dB	
Coupling (In-Out)	12.8+2dB above 800MHz / 12.8+2.5±dB above 800MHz	
Input Power(Max)	+10dBm	
Impedance	50 Ω	
Operating temp	-15 ~ +65 °C	
Connectors	N Type	
Mount	19" rack	

