




Combiner

HS-HBMTX-QU44

Hybrid Matrix 4*4
450~6000MHz

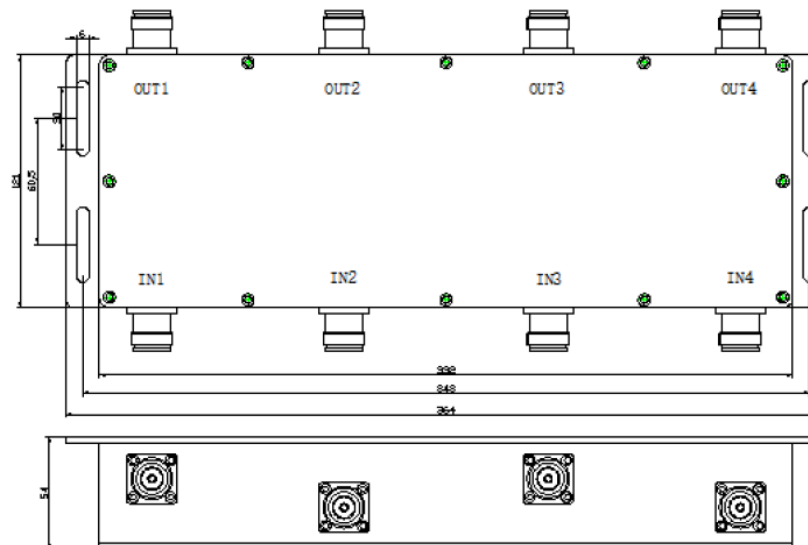

Electricals	Frequency range	450~6000MHz	
	Insertion Loss	≤ 8.5dB	
	Isolation	≥18dB@450~960MHz	≥18dB@1710~6000MHz
	Return loss/VSWR	1.5≥ @450~960MHz	1.5≥ @1710~6000MHz
	Impedance	50Ω	
	Input power	≤300W(Avg.)	
Environmental	Operating temp.	-30 C~ 85 C	
	Relative humidity	5% ~ 95%	
	Application	Indoor or Outdoor(IP65)	
Mechanicals	Connectors	N type female	
	Dimensions(mm)	364*121*54(withoutConnector)	

