




## Coupler

# HS-DC-QU-XX

6dB/10dB Directional Coupler  
600~6000MHz

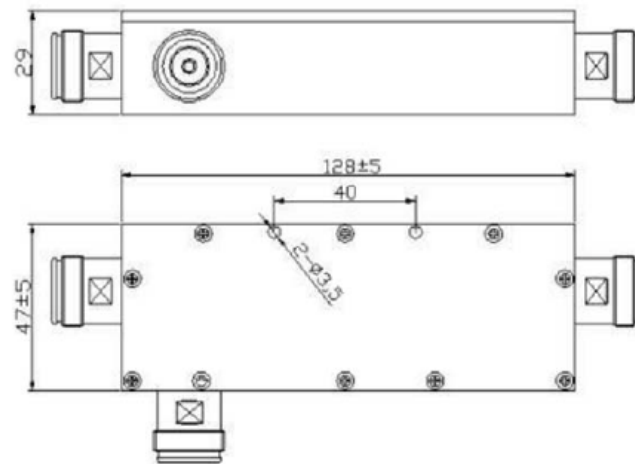

Part No.		HS-DC-QU-06 [6dB]			HS-DC-QU-10 [10dB]		
Electricals	Frequency range	600~6000MHz					
	MHz	600~698	698~2700	2700~6000	600~698	698~2700	2700~6000
	Insertion loss	≤ 2dB			≤ 1.2dB		
	Accuracy	1.8dB	1.5dB	1.8dB	2.2dB	1.8dB	2.2dB
	Isolation	≤ 26dB	≤ 24dB	≤ 18dB	≤ 30dB	≤ 26dB	≤ 22dB
	PIMD	≤-153dBc@2x43dBm(698~2700MHz)					
	Impedance	50Ω					
	Input power	≤200W(Avg.)					
Environmental	Operating temp.	-30 C~ 65 C					
	Relative humidity	5% ~ 95%					
	Application	Indoor or Outdoor(IP65)					
Mechanicals	Connectors	N Female					
	Dimensions(mm)	128*47*29					

