



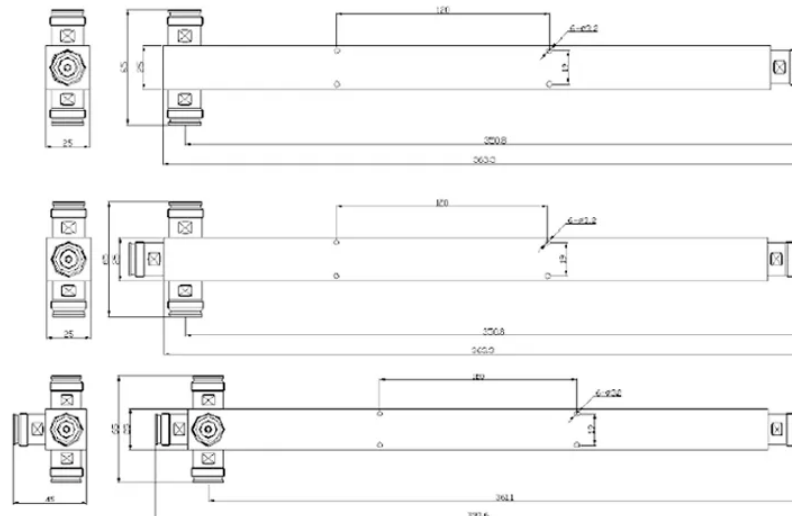

Splitter

HS-SPT-QU-HF-XW

2way/3way/4way Power Splitter
450~6000MHz



Part No.	HS-SPT-QU-HF-2W [2 way]		HS-SPT-QU-HF-3W [2way]		HS-SPT-QU-HF-4W [4way]		
Electricals	Frequency range	450~6000MHz					
	MHz	450~960	1710~6000	450~960	1710~6000	450~960	1710~6000
	Insertion loss	≤ 3.3dB	≤ 4.3dB	≤ 5.3dB	≤ 6dB	≤ 6.6dB	≤ 7.5dB
	VSWR	≤1.3	≤1.4	≤1.35	≤1.45	≤1.4	≤1.5
	Return loss/VSWR	≤-19dB/1.25					
	Impedance	50Ω					
	Input power	≤200W(Avg.)					
Environmental	Operating temp.	-30 C~ 65 C					
	Relative humidity	5% ~ 95%					
	Application	Indoor or Outdoor(IP65)					
Mechanicals	Connectors	N type female					
	Dimensions(mm)	364*65*25		3934*65*25		394*65*45	

